

White Bay 6

Operational noise compliance assessment 2023

Prepared for Sydney Harbour Boat Storage

April 2023

White Bay 6

Operational noise compliance assessment 2023

Sydney Harbour Boat Storage

E230131 RP1

April 2023

Version	Date	Prepared by	Reviewed by	Comments
1	01/05/2023	Jared Blackburn	Carl Fokkema	Draft

Approved by

Carl Fokkema

Associate - Acoustics

1 May 2023

Ground floor 20 Chandos Street

St Leonards NSW 2065

PO Box 21

St Leonards NSW 1590

This report has been prepared in accordance with the brief provided by Sydney Harbour Boat Storage and, in its preparation, EMM has relied upon the information collected at the times and under the conditions specified in this report. All findings, conclusions or recommendations contained in this report are based on those aforementioned circumstances. The contents of this report are private and confidential. This report is only for Sydney Harbour Boat Storage's use in accordance with its agreement with EMM and is not to be relied on by or made available to any other party without EMM's prior written consent. Except as permitted by the *Copyright Act 1968* (Cth) and only to the extent incapable of exclusion, any other use (including use or reproduction of this report for resale or other commercial purposes) is prohibited without EMM's prior written consent. Except where expressly agreed to by EMM in writing, and to the extent permitted by law, EMM will have no liability (and assumes no duty of care) to any person in relation to this document, other than to Sydney Harbour Boat Storage (and subject to the terms of EMM's agreement with Sydney Harbour Boat Storage).

© EMM Consulting Pty Ltd, Ground Floor Suite 01, 20 Chandos Street, St Leonards NSW 2065, April 2023.

TABLE OF CONTENTS

1	Introduction	1
1.1	Background	1
1.2	Attended monitoring locations	1
1.3	Terminology and abbreviations	3
2	Noise limits	4
2.1	Environment protection licence	4
2.2	Noise limits	4
2.3	Meteorological conditions	4
2.4	Additional requirements	4
3	Methodology	5
3.1	Overview	5
3.2	Attended noise monitoring	5
3.3	Modifying factors	6
3.4	Instrumentation	6
4	Results	7
4.1	Total measured noise levels and atmospheric conditions	7
4.2	Site only noise levels	8
5	Summary	11

Appendices

Appendix A	Noise perception and examples	A.1
Appendix B	Regulator documents	B.1
Appendix C	Calibration certificates	C.1

Tables

Table 1.1	Attended noise monitoring locations	1
Table 1.2	Terminology and abbreviations	3
Table 2.1	Noise impact limits, dB	4
Table 3.1	Attended noise monitoring equipment	6
Table 4.1	Total measured noise levels – 8 March 2023	7
Table 4.2	Measured atmospheric conditions – 8 March 2023	7
Table 4.3	Site noise levels and limits – 8 March 2023	9

Table 4.4	Calculated site noise levels and limits – 8 March 2023	10
Table A.1	Perceived change in noise	A.2

Figures

_Toc132725133

Figure 1.1	Attended noise monitoring locations	2
Figure A.1	Common noise levels	A.2

1 Introduction

1.1 Background

EMM Consulting Pty Ltd (EMM) was engaged by Sydney Harbour Boat Storage to conduct an annual operational noise compliance assessment of the marine storage and refuelling facility (the site) at Berth 6, White Bay, NSW. The survey purpose was to quantify the acoustic environment and compare site noise levels against specified limits.

Attended environmental noise monitoring described in this report was done during the day/evening/night period(s) of 8 March 2023 at 4 monitoring locations.

1.2 Attended monitoring locations

Site monitoring locations are detailed in Table 1.1 and shown on Figure 1.1. It should be noted that Figure 1.1 shows actual monitoring positions, not necessarily the location of residences.

Table 1.1 **Attended noise monitoring locations**

ID	Description/address	Coordinates (MGA56)	
		Easting	Northing
1	South east boundary of site	332647	6251765
2	North east boundary of site	332703	6251843
3	North west boundary of site	332605	6251848
4	1 Grafton St, Balmain	332562	6251878
5	12A Grafton St, Balmain	332489	6251877
6	24 Datchett Street	332777	6251957
7	41 Pirrama Road	332798	6251508



KEY

- The site
- Sensitive receiver
- Short-term attended noise monitoring location

INSET KEY

- Major road
- NPWS reserve
- State forest

Site locality and noise monitoring locations

White Bay 6
Operational noise compliance assessment
Figure 1.1

1.3 Terminology and abbreviations

Some definitions of terms and abbreviations which may be used in this report are provided in Table 1.2.

Table 1.2 Terminology and abbreviations

Term/descriptor	Definition
dB(A)	Noise level measurement units are decibels (dB). The “A” weighting scale is used to approximate how humans hear noise.
L_{Amax}	The maximum root mean squared A-weighted noise level over a time period.
L_{A1}	The A-weighted noise level which is exceeded for 1 per cent of the time.
$L_{A1,1minute}$	The A-weighted noise level which is exceeded for 1 per cent of the specified time period of 1 minute.
L_{A10}	The A-weighted noise level which is exceeded for 10 percent of the time.
L_{Aeq}	The energy average A-weighted noise level.
L_{A50}	The A-weighted noise level which is exceeded for 50 per cent of the time, also the median noise level during a measurement period.
L_{A90}	The A-weighted noise level exceeded for 90 percent of the time, also referred to as the “background” noise level and commonly used to derive noise limits.
L_{Amin}	The minimum A-weighted noise level over a time period.
L_{Ceq}	The energy average C-weighted noise energy during a measurement period. The “C” weighting scale is used to take into account low-frequency components of noise within the audibility range of humans.
SPL	Sound pressure level. Fluctuations in pressure measured as 10 times a logarithmic scale, with the reference pressure being 20 micropascals.
Hertz (Hz)	The frequency of fluctuations in pressure, measured in cycles per second. Most sounds are a combination of many frequencies together.
AWS	Automatic weather station used to collect meteorological data, typically at an altitude of 10 metres
VTG	Vertical temperature gradient in degrees Celsius per 100 metres altitude.
Sigma-theta	The standard deviation of the horizontal wind direction over a period of time.
IA	Inaudible. When site noise is noted as IA then there was no site noise at the monitoring location.
NM	Not Measurable. If site noise is noted as NM, this means some noise was audible but could not be quantified.
Day	Monday – Saturday: 7 am to 6 pm, on Sundays and Public Holidays: 8 am to 6 pm.
Evening	Monday – Saturday: 6 pm to 10 pm, on Sundays and Public Holidays: 6 pm to 10 pm.
Night	Monday – Saturday: 10 pm to 7 am, on Sundays and Public Holidays: 10 pm to 8 am.

Appendix A provides further information that gives an indication as to how an average person perceives changes in noise level, and examples of common noise levels.

2 Noise limits

2.1 Environment protection licence

Noise assessment criteria for the operations are provided in White Bay 6 Pty Ltd Environmental Protection Licence (EPL) 20144 as per the notice of variation 3 March 2021 (current at the time of monitoring). Relevant sections of the EPL are reproduced in Appendix B.1.

2.2 Noise limits

Noise impact limits based on the site's EPL L3 are provided in Table 2.1.

Table 2.1 Noise impact limits, dB

Location	Day $L_{Aeq,15minute}$	Evening $L_{Aeq,15minute}$	Night $L_{Aeq,15minute}$	Night $L_{A1,1minute}$
4	54	48	48	59
5	36	35	35	60
6	49	44	44	54
7	40	35	35	61

2.3 Meteorological conditions

Condition L3.9 of the EPL states the meteorological conditions which the noise limits apply under:

- L3.9 The noise emission limits identified in this condition apply under meteorological conditions of wind speed of up to 3 metres per second at 10 metres above ground level, and temperature inversion conditions.

2.4 Additional requirements

Monitoring and reporting have been done in accordance with the NSW EPA 'Noise Policy for Industry' (NPfI) issued in October 2017 and the 'Approved methods for the measurement and analysis of environmental noise in NSW' (Approved Methods) issued in January 2022.

3 Methodology

3.1 Overview

Attended environmental noise monitoring was done in general accordance with Australian Standard AS1055 'Acoustics, Description and Measurement of Environmental Noise' and relevant NSW requirements. Meteorological data was obtained from the Fort Denison automatic weather station (AWS) (station ID 066022) which allowed correlation of atmospheric parameters with measured site noise levels.

3.2 Attended noise monitoring

During this survey, attended noise monitoring was conducted during the day/evening/night period at each location. The duration of each measurement was 15 minutes. Atmospheric conditions were measured at each monitoring location.

Measured sound levels from various sources were noted during each measurement, and particular attention was paid to the extent of site's contribution (if any) to measured levels. At each monitoring location, the site-only $L_{Aeq,15\text{minute}}$ and L_{Amax} were measured directly or determined by other methods detailed in Section 7.1 of the NPfI.

If the exact noise levels from site could not be established due to masking by other noise sources in a similar frequency range, but site noise was determined to be at least 5 dB lower than relevant limits, then a maximum estimate of site noise may be provided. This is expressed as a 'less than' quantity, such as <20 dB or <30 dB.

The terms 'Inaudible' (IA) or 'Not Measurable' (NM) may be used in this report. When site noise is noted as IA, no site noise was audible at the monitoring location. When site noise is noted as NM, this means site noise was audible but could not be quantified. All results noted as NM in this report were due to one or more of the following:

- Site noise levels were extremely low and unlikely, in many cases, to be noticed.
- Site noise levels were masked by other more dominant noise sources that are characteristic of the environment, such as breeze in foliage or continuous road traffic noise, that cannot be eliminated by monitoring at an alternate or intermediate location.
- It was not feasible or reasonable to employ methods such as to move closer and back calculate. Cases may include rough terrain preventing closer measurement, addition/removal of significant source to receiver shielding caused by moving closer, and meteorological conditions where back calculation may not be accurate.

For this assessment, the measured L_{Amax} has been used as a conservative estimate of $L_{A1,1\text{minute}}$. The EPA accepts sleep disturbance analysis based on either the $L_{A1,1\text{minute}}$ or L_{Amax} metrics, with the L_{Amax} representing a more conservative assessment of site noise emissions.

Measurements taken directly at noise sensitive receivers found that existing ambient noise levels were generally too high to determine a noise contribution from the site. Measurements were subsequently taken at three points on the boundary of the site, where extraneous noise sources did not significantly contribute to the noise profile. The relevant measurement points are indicated in Table 1.1 (measurement points 1, 2 and 3).

The site noise contribution at each noise sensitive location was determined as per condition 7.1 of the NSW Environmental Protection Authority's (EPA) 20017 Noise Policy for Industry (NPfI) requirements, which states that:

Where direct measurement of noise at a compliance location is not practical because of poor signal-to-noise ratios (that is, extraneous noise is louder than the noise under investigation), or where access to the location has been denied or is unavailable, measurements at intermediate locations between the source and the receiver location, where signal-to-noise ratios are higher, may be a viable option.

Based on attended measurements conducted during the evening and night periods, noise contribution from the plant and equipment operating (refueling only) was not quantifiable over existing ambient noise levels at residential locations. Operations from the client confirm refueling is the only activity during evening and night. Therefore, for evening and night operations site noise predictions were made using onsite measurements. A sound pressure level (SPL) of L_{Aeq} 55 dB at 15 metres was confirmed for refueling activities, equating to a sound power level (L_w) of L_{Aeq} 87 dB. The adopted calculation method for evening and night operations accounts for measured sound power levels and distance from sources to receivers. No additional air absorption or shielding effects from terrain or building structures was incorporated

3.3 Modifying factors

Based on a detailed review and analysis of noise measurement data, there was no evidence of low frequency noise, tonality or any other modifying factors as defined in the NPfl (EPA 2017) at any monitoring location; therefore, modifying factor penalties were not applicable. All measurements were evaluated for potential modifying factors in accordance with the NPfl. Specific methodology for assessment of each modifying factor is outlined in Fact Sheet C of the NPfl.

3.4 Instrumentation

Equipment used to measure environmental noise levels is detailed in Table 3.1. Calibration certificates are provided in Appendix C.

Table 3.1 Attended noise monitoring equipment

Item	Serial number	Calibration due date	Relevant standard
Brüel & Kjær Type 2250 sound level meter	3008201	26 July 2023	IEC 61672-1:2002
Svantek SV36 calibrator	86311	17 March 2023	IEC 60942:2003

4 Results

4.1 Total measured noise levels and atmospheric conditions

Overall noise levels measured at each location during attended measurements are provided in Table 4.1.

Table 4.1 Total measured noise levels – 8 March 2023 ¹

Location	Start date and time	L _{Amax} dB	L _{A1} dB	L _{A10} dB	L _{Aeq} dB	L _{A50} dB	L _{A90} dB	L _{Amin} dB
3 ²	10:57 am	76	76	58	57	54	51	48
2 ²	11:16 am	72	72	63	59	56	47	42
1 ²	11:35 am	75	75	56	55	54	52	50
4	12:16 pm	86	86	59	63	52	49	46
5	12:55 pm	64	64	52	51	50	49	47
6	1:21 pm	62	62	53	51	49	47	45
7	1:57 pm	73	73	60	56	52	50	47
6	7:17 pm	65	65	51	49	47	45	43
5	7:37 pm	72	72	53	52	51	50	48
7	8:09 pm	71	71	54	53	47	45	43
4	8:39 pm	58	58	47	46	46	45	43
4	10:02 pm	58	58	46	45	45	44	43
7	10:31 pm	70	70	51	51	45	44	42
5	11:06 pm	58	58	51	50	50	49	48
6	11:28 pm	52	52	46	45	44	43	42

Notes: 1. Levels in this table are not necessarily the result of activity at site.
2. On-site measurement.

Atmospheric condition data measured by the operator during each measurement using a hand-held weather meter is shown in Table 4.2. The wind speed, direction and temperature were measured at approximately 1.5 metres above ground. Attended noise monitoring is not done during rain, hail, or wind speeds above 5 m/s at microphone height.

Table 4.2 Measured atmospheric conditions – 8 March 2023

Location	Start date and time	Temperature °C	Wind speed m/s	Wind direction ° Magnetic north ¹	Cloud cover 1/8s
3	10:57 am	26	3.1	W	1
2	11:16 am	27	2.6	WNW	1
1	11:35 am	26	2.6	WNW	1

Table 4.2 **Measured atmospheric conditions – 8 March 2023**

Location	Start date and time	Temperature °C	Wind speed m/s	Wind direction ° Magnetic north ¹	Cloud cover 1/8s
4	12:16 pm	28	2.1	W	1
5	12:55 pm	30	3.5	NE	1
6	1:21 pm	28	3.9	NE	1
7	1:57 pm	27	3.9	NE	1
6	7:17 pm	23	3.0	E	1
5	7:37 pm	23	3.0	E	1
7	8:09 pm	23	2.4	E	1
4	8:39 pm	23	1.8	ESE	1
4	10:02 pm	23	1.4	ESE	1
7	10:31 pm	22	1.9	SSW	1
5	11:06 pm	22	2.1	SW	1
6	11:28 pm	22	2.9	WSW	1

Notes: 1. “-” indicates calm conditions at monitoring location.

4.2 Site only noise levels

4.2.1 Modifying factors

There were no modifying factors, as defined in the NPfI, applicable during the survey.

4.2.2 Monitoring results

Table 4.3 provides measured site noise levels in the absence of other sources, where possible, and includes weather data from the Fort Denison AWS. Limits are applicable if weather conditions were within specified parameters during each measurement.

Table 4.3 Site noise levels and limits – 8 March 2023

Location	Start Date and Time	Wind		Stability Class	Limits apply? ¹	Limits, dB		Site levels, dB		Exceedances, dB ¹	
		Speed m/s	Direction ³			L _{Aeq,15minute}	L _{Amax}	L _{Aeq,15minute} ²	L _{Amax}	L _{Aeq,15minute}	L _{Amax}
4	12:16 pm	2.1	W	C	Y	54	-	51	60	Nil	Nil
5	12:55 pm	3.5	NE	D	Y	36	-	IA	IA	-	-
6	1:21 pm	3.9	NE	D	Y	49	-	IA	IA	-	-
7	1:57 pm	3.9	NE	D	Y	40	-	IA	IA	-	-
6	7:17 pm	3.0	E	D	Y	44	-	IA	IA	-	-
5	7:37 pm	3.0	E	E	Y	35	-	IA	IA	-	-
7	8:09 pm	2.4	E	D	Y	35	-	IA	IA	-	-
4	8:39 pm	1.8	ESE	E	Y	48	-	IA	IA	-	-
4	10:02 pm	1.4	ESE	F	N	48	59	IA	IA	-	-
7	10:31 pm	1.9	SSW	E	Y	35	61	IA	IA	-	-
5	11:06 pm	2.1	SW	F	N	35	60	IA	IA	-	-
6	11:28 pm	2.9	WSW	D	Y	44	54	IA	IA	-	-

Notes: 1. Noise emission limits are applicable if weather conditions were within parameters specified in Section 2.3. NA in exceedance column indicates that limits were not applicable due to weather conditions.
2. Site-only L_{Aeq,15minute}, includes modifying factor penalties if applicable.
3. Degrees magnetic north, “-” indicates calm conditions.

4.2.3 Calculated site noise levels

Table 4.4 summarises the site noise contributions at the noise sensitive receivers. All receivers contributions are based on predictions from measured noise levels at positions 1, 2 and 3 in Table 4.1. The total noise levels presented for these locations are assumed to be generated by White Bay 6. This is a conservative assumption given that other extraneous noise sources were also observed during the noise measurements. At all receivers, the predicted noise levels satisfy the limits specified in the EPL.

Table 4.4 Calculated site noise levels and limits – 8 March 2023

Location	Start Date and Time	Wind		Stability Class	Limits apply? ¹	Limits, dB		Site levels, dB		Exceedances, dB ¹	
		Speed m/s	Direction ³			L _{Aeq,15minute}	L _{Amax}	L _{Aeq,15minute} ²	L _{Amax}	L _{Aeq,15minute}	L _{Amax}
4 ²	12:16 pm	2.1	W	C	Y	54	-	<53	<53	Nil	Nil
5 ²	12:55 pm	3.5	NE	D	Y	36	-	<36	<36	Nil	Nil
6 ²	1:21 pm	3.9	NE	D	Y	49	-	<42	<42	Nil	Nil
7 ²	1:57 pm	3.9	NE	D	Y	40	-	<33	<33	Nil	Nil
6 ³	7:17 pm	3.0	E	D	Y	44	-	<31	<31	Nil	Nil
5 ³	7:37 pm	3.0	E	E	Y	35	-	<27	<27	Nil	Nil
7 ³	8:09 pm	2.4	E	D	Y	35	-	<26	<26	Nil	Nil
4 ³	8:39 pm	1.8	ESE	E	Y	48	-	<35	<35	Nil	Nil
4 ³	10:02 pm	1.4	ESE	F	N	48	59	<35	<35	Nil	Nil
7 ³	10:31 pm	1.9	SSW	E	Y	35	61	<26	<26	Nil	Nil
5 ³	11:06 pm	2.1	SW	F	N	35	60	<27	<27	Nil	Nil
6 ³	11:28 pm	2.9	WSW	D	Y	44	54	<31	<31	Nil	Nil

- Notes:
1. Only refuelling activities included during evening and night-time periods.
 2. Noise contribution was determined utilising activity sound pressure levels of day operations on site and applying distance attenuation.
 3. Noise contribution was determined utilising activity sound power measurements of refuelling activities on site and distance to receiver locations.

5 Summary

EMM was engaged by Sydney Harbour Boat Storage to conduct an annual noise survey of annual operation noise compliance assessment of the marine storage and refuelling facility (the site) at Berth 6, White Bay, NSW. The survey purpose was to quantify the acoustic environment and compare site noise levels against specified EPL 20144 limits.

Attended environmental noise monitoring described in this report was done during the day/evening/night period(s) of 8 March 2023 at 4 monitoring locations.

Section 7.1 of the NPfI states that where direct measurement of noise at a compliance location is not practical due to poor signal-to-noise ratios (that is, extraneous noise is louder than the noise under investigation), measurements at intermediate locations between the source and the receiver location, where signal-to noise ratios are higher, is permissible. This method has been adopted to calculate the site noise contribution at residential locations listed in the EPL where direct measurement was not practical.

The measured and calculated site noise contributions, based on a three-dimensional model that was calibrated using measurements at intermediate locations, satisfied the EPL noise limits at all residences, for all periods.

Appendix A

Noise perception and examples

A.1 Noise levels

Table A.1 gives an indication as to how an average person perceives changes in noise level. Examples of common noise levels are provided in Figure A.1.

Table A.1 Perceived change in noise

Change in sound pressure level (dB)	Perceived change in noise
up to 2	Not perceptible
3	Just perceptible
5	Noticeable difference
10	Twice (or half) as loud
15	Large change
20	Four times (or quarter) as loud

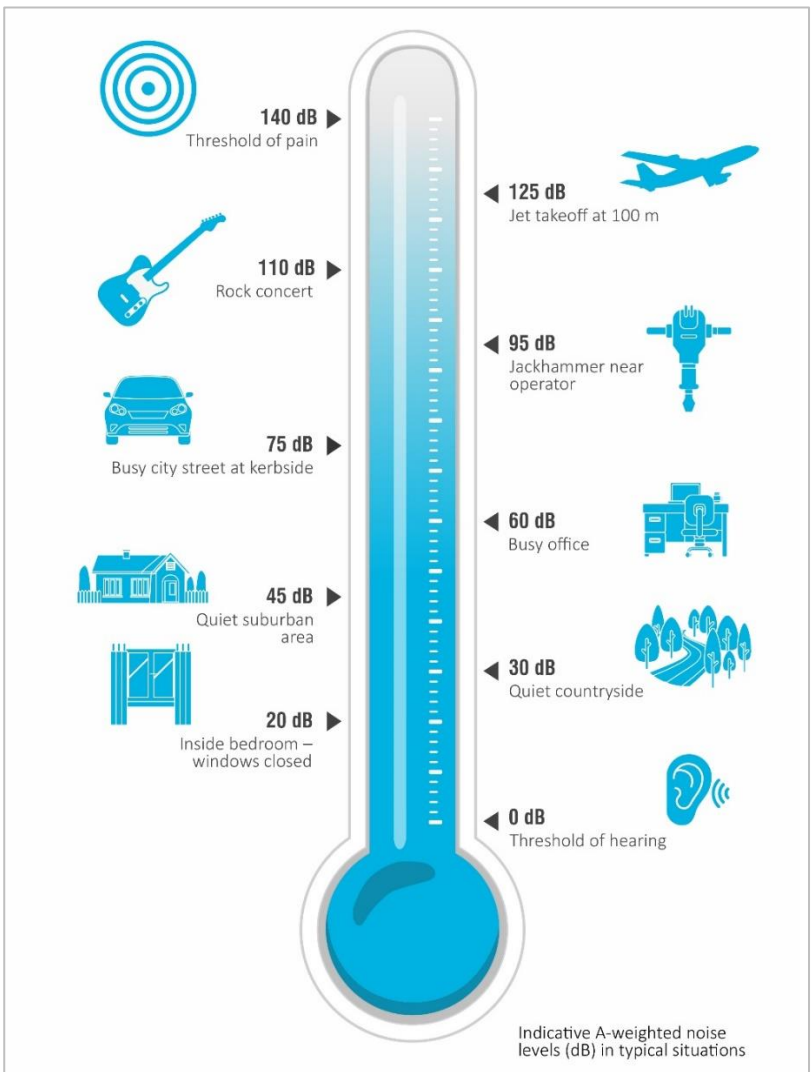


Figure A.1 Common noise levels

Appendix B

Regulator documents



Environment Protection Licence

Licence - 20144

Licence Details	
Number:	20144
Anniversary Date:	10-August

Licensee
WHITE BAY 6 PTY LTD
PO BOX 504
BALMAIN NSW 2041

Premises
WHITE BAY, BERTH 6
ROBERT STREET
BALMAIN NSW 2041

Scheduled Activity
Marinas and boat repairs

Fee Based Activity	Scale
Boat construction/maintenance (general)	Any annual handling capacity

Region
Metropolitan West - Sydney
4 Parramatta Square, 12 Darcy Street
PARRAMATTA NSW 2150
Phone: (02) 9995 5000
Fax: (02) 9995 6900
Locked Bag 5022
PARRAMATTA NSW 2124



Environment Protection Licence

Licence - 20144

1	Noise monitoring
2	Noise monitoring
3	Noise monitoring
4	Noise monitoring

3 Limit Conditions

L1 Pollution of waters

L1.1 Except as may be expressly provided in any other condition of this licence, the licensee must comply with section 120 of the Protection of the Environment Operations Act 1997.

L2 Waste

L2.1 The licensee must not cause, permit or allow any waste to be received at the premises, except the wastes expressly referred to in the column titled “Waste” and meeting the definition, if any, in the column titled “Description” in the table below.

Any waste received at the premises must only be used for the activities referred to in relation to that waste in the column titled “Activity” in the table below.

Any waste received at the premises is subject to those limits or conditions, if any, referred to in relation to that waste contained in the column titled “Other Limits” in the table below.

This condition does not limit any other conditions in this licence.

Code	Waste	Description	Activity	Other Limits
NA	Waste	Any waste received on site that is below licensing thresholds in Schedule 1 of the Protection of the Environment Operations Act, as in force from time to time	-	NA
NA	General or Specific exempted waste	Waste that meets all the conditions of a resource recovery exemption under Clause 92 of the Protection of the Environment Operations (Waste) Regulation 2014.	As specified in each particular resource recovery exemption	NA

L3 Noise limits

L3.1 The use of any part of the premises including vessel refuelling and other activities, and the operation of

Environment Protection Licence

Licence - 20144

any plant, machinery or other equipment on the site must not exceed the sound level pressure (noise) limits presented in the Tables below.

Note: The limits represent the sound pressure level (noise) contribution, at the nominated receiver locations in the Table.

L3.2 Day Noise Limits - During operation of the facility

Location	LAeq(15 minute)
1 Grafton Street, Balmain	54
Datchett Street, Balmain East	49
33 Adolphus Street, Balmain	36
2 Point Street, Pyrmont	40

L3.3 Evening Noise Limits - During operation of the facility

Location	LAeq(15 minute)
1 Grafton Street, Balmain	48
Datchett Street, Balmain East	44
33 Adolphus Street, Balmain	35
2 Point Street, Pyrmont	35

L3.4 Night Noise Limits - During operation of the facility

Location	LAeq(15 minute)	LAeq(9 hours)	LA1(1 minute)
1 Grafton Street, Balmain	48	45	59*
Datchett Street, Balmain East	44	41	54*
33 Adolphus Street, Balmain	35	35	60
2 Point Street, Pyrmont	35	35	61

Note: * The sleep disturbance limits do not apply to trucks whilst engaged in movements on the access road to enter or leave the site.

L3.5 Noise from the premises is to be measured at the most affected point within the residential boundary, or at the most affected point within 30 metres of the dwelling where the dwelling is more than 30 metres from the boundary, to determine compliance with the noise level limits in this condition unless otherwise stated.

L3.6 Noise from the premises is to be measured at 1m from the dwelling facade to determine compliance with the LA1(1 minute) noise level in this condition.

Environment Protection Licence

Licence - 20144

- L3.7 Where it can be demonstrated that direct measurement of noise from the premises is impractical the EPA may accept alternative means of determining compliance (see Chapter 11 of the *NSW Industrial Noise Policy*).
- L3.8 The modification factors presented in Section 4 of the *NSW Industrial Noise Policy* shall also be applied to the measured noise levels where practicable.
- L3.9 The noise emission limits identified in this condition apply under meteorological conditions of wind speed of up to 3 metres per second at 10 metres above ground level, and temperature inversion conditions.

L4 Potentially offensive odour

- L4.1 No condition of this licence identifies a potentially offensive odour for the purposes of Section 129 of the Protection of the Environment Operations Act 1997.
- L4.2 The licensee must not cause or permit the emission of offensive odour beyond the boundary of the premises.

Note: Section 129 of the Protection of the Environment Operations Act 1997, provides that the licensee must not cause or permit the emission of any offensive odour from the premises but provides a defence if the emission is identified in the relevant environment protection licence as a potentially offensive odour and the odour was emitted in accordance with the conditions of a licence directed at minimising odour.

4 Operating Conditions

O1 Activities must be carried out in a competent manner

- O1.1 Licensed activities must be carried out in a competent manner.
This includes:
 - a) the processing, handling, movement and storage of materials and substances used to carry out the activity; and
 - b) the treatment, storage, processing, reprocessing, transport and disposal of waste generated by the activity.

O2 Maintenance of plant and equipment

- O2.1 All plant and equipment installed at the premises or used in connection with the licensed activity:
 - a) must be maintained in a proper and efficient condition; and
 - b) must be operated in a proper and efficient manner.

O3 Dust

- O3.1 Where neither a concentration nor rate for emission of air impurities has been prescribed, for the purposes of Section 128 of the Act, all operations and activities occurring at the premises must be conducted in a manner that will minimise airborne impurities at the boundary of the premises.

Appendix C

Calibration certificates

CERTIFICATE OF CALIBRATION

CERTIFICATE NO: C30881

EQUIPMENT TESTED : Sound Level Calibrator

Manufacturer: Svantek

Type No: SV-36

Serial No: 86311

Owner: EMM Consulting

Suite 01, 20 Chandos St

St Leonards NSW 2065

Tests Performed: Measured Output Pressure level, Frequency & Distortion

Comments: See Details overleaf. All Test Passed.

Parameter	Pre-Adj	Adj Y/N	Output: (dB re 20 µPa)	Frequency (Hz)	THD&N (%)
Level1:	NA	N	94.05 dB	999.99 Hz	1.00 %
Level2:	NA	N	114.05 dB	999.99 Hz	1.00 %
Uncertainty			±0.11 dB	±0.05%	±0.20 %

Uncertainty (at 95% c.l.) k=2

CONDITION OF TEST:

Ambient Pressure 1002 hPa ±1 hPa

Temperature 23 °C ±1° C

Relative Humidity 41 % ±5%

Date of Receipt : 20/10/2021

Date of Calibration : 20/10/2021

Date of Issue : 20/10/2021

Acu-Vib Test AVP02 (Calibrators)

Procedure: Test Method: AS IEC 60942 - 2017

CHECKED BY: 

AUTHORISED
SIGNATURE:


Jack Kiehl

Accredited for compliance with ISO/IEC 17025 - Calibration

Results of the tests, calibration and/or measurements included in this document are traceable to SI units through reference equipment that has been calibrated by the Australian National Measurement Institute or other NATA accredited laboratories demonstrating traceability.

This report applies only to the item identified in the report and may not be reproduced in part.

The uncertainties quoted are calculated in accordance with the methods of the ISO Guide to the Uncertainty of Measurement and quoted at a coverage factor of 2 with a confidence interval of approximately 95%.



WORLD RECOGNISED
ACCREDITATION

Accredited Lab No. 9262
Acoustic and Vibration
Measurements


Acu-Vib Electronics
CALIBRATIONS SALES RENTALS REPAIRS

Head Office & Calibration Laboratory
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154
(02) 9680 8133
www.acu-vib.com.au

CERTIFICATE OF CALIBRATION

CERTIFICATE No: **SLM 30138**

EQUIPMENT TESTED: Sound Level Meter

Manufacturer: B & K

Type No: 2250

Mic. Type: B&K 4189

Pre-Amp. Type: ZC0032

Serial No: 3008201

Serial No: 2888134

Serial No: 16037

Filter Type: 1/3 Octave

Test No: FILT 6597

Owner: EMM Consulting

Ground Floor, Suite 01, 20 Chandos St
St Leonards NSW 2065

Tests IEC 61672-3:2013,

Performed: IEC 1260:1995, & AS/NZS 4476:1997

Comments: All Test passed for Class 1. (See overleaf for details)

CONDITIONS OF TEST:

Ambient Pressure 1001 hPa ± 1 hPa

Temperature 22 $^{\circ}\text{C} \pm 1^{\circ}\text{C}$

Relative Humidity 36 % $\pm 5\%$

Date of Receipt : 23/07/2021

Date of Calibration : 26/07/2021

Date of Issue : 26/07/2021

Acu-Vib Test Procedure: AVP10 (SLM) & AVP06 (Filters)

CHECKED BY:

AUTHORISED SIGNATURE:

Hein Soc

Accredited for compliance with ISO/IEC 17025 - Calibration
Results of the tests, calibration and/or measurements included in this document are traceable to SI units through reference equipment that has been calibrated by the Australian National Measurement Institute or other NATA accredited laboratories demonstrating traceability.

This report applies only to the item identified in the report and may not be reproduced in part.

The uncertainties quoted are calculated in accordance with the methods of the ISO Guide to the Uncertainty of Measurement and quoted at a coverage factor of 2 with a confidence interval of approximately 95%.



WORLD RECOGNISED
ACCREDITATION

Accredited Lab No. 9262
Acoustic and Vibration
Measurements

Acu-Vib Electronics
CALIBRATIONS SALES RENTALS REPAIRS

Head Office & Calibration Laboratory
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154
(02) 9680 8133
www.acu-vib.com.au

Australia

SYDNEY

Ground floor 20 Chandos Street
St Leonards NSW 2065
T 02 9493 9500

NEWCASTLE

Level 3 175 Scott Street
Newcastle NSW 2300
T 02 4907 4800

BRISBANE

Level 1 87 Wickham Terrace
Spring Hill QLD 4000
T 07 3648 1200

CANBERRA

Suite 2.04 Level 2
15 London Circuit
Canberra City ACT 2601

ADELAIDE

Level 4 74 Pirie Street
Adelaide SA 5000
T 08 8232 2253

MELBOURNE

Suite 8.03 Level 8
454 Collins Street
Melbourne VIC 3000
T 03 9993 1900

PERTH

Suite 9.02 Level 9
109 St Georges Terrace
Perth WA 6000
T 08 6430 4800

Canada

TORONTO

2345 Yonge Street Suite 300
Toronto ON M4P 2E5
T 647 467 1605

VANCOUVER

60 W 6th Ave
Vancouver BC V5Y 1K1
T 604 999 8297



[linkedin.com/company/emm-consulting-pty-limited](https://www.linkedin.com/company/emm-consulting-pty-limited)



emmconsulting.com.au